Technical data sheet
CARO 90 GAS

OPTIONS

Firebox door	
Steel door	✓
Glass door	✓
Side window	
Without side window	✓
Two side windows	✓
Coating	
Black	✓
Platinum	✓
Mocha	✓
Nickel	✓
Sand	✓
Top plates	
Steel 8 mm	✓
Operating	
Remote control	Standard
attika gas app	Option
Home Automation	Option



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

Technical data sheet
CARO 90 GAS

PRODUCT INFORMATION

Connections	
Flue pipe Ø (LAS)	100/150 mm
Gas connection	Ø 12 mm | 1/2" | 3/8"
Flue pipe outlet	
Top	✓
Rear	✓
Weight depending on model/equipment	
Weight depending on model/equipment	130 kg
Permissible chimney systems	
Schiedel Ontop Metaloterm	✓
Jeremias	✓
M&G Group	✓
Poujoulat	✓
Certifications	
Energy efficiency class	A
CE	EU 2016/426
SVGW	18-035-3

PRODUCT INFORMATION

Certifications	
SVGW	✓

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

Technical data sheet
CARO 90 GAS

SERVICES

Output range	
Natural gas	G20/20 mbar	1.7 - 6.3 kW
Propane gas	G31/50 mbar	1.8 - 5.7 kW
Gas consumption	
Natural gas	G20/20 mbar	0.8 m^3/h
Propane gas	G31/50 mbar	0.3 m^3/h
Maximum load	
Natural gas	G20/20 mbar	8.1 kW
Propane gas	G31/50 mbar	7.2 kW
Energy efficiency	
Efficiency class Natural gas	G20/20 mbar	1
Efficiency class Propane gas	G31/50 mbar	1


INSTALLATION


Distances to combustible materials (without side window)	
A: to the back	50 mm
B: to the side wall	250 mm
C: to the front	700 mm
D: upwards	1000 mm
Distances to combustible materials (with side window)	
A: to the back	50 mm
B: to the side wall	300 mm
C: to the front	700 mm
D: upwards	1000 mm


ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch


Technical data sheet
CARO 90 GAS

Sketches of safety distances

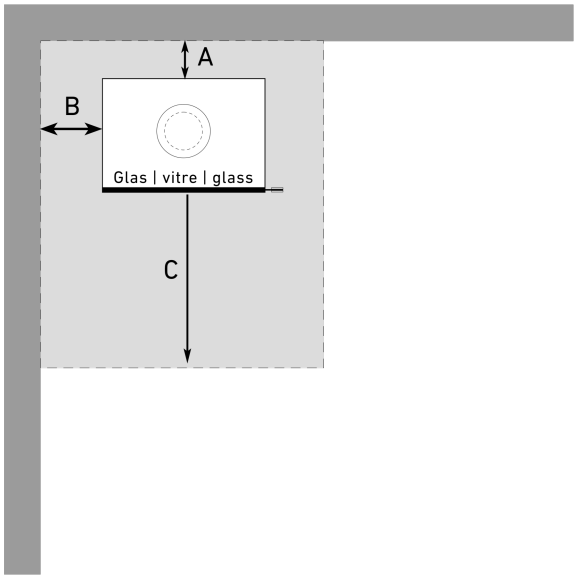

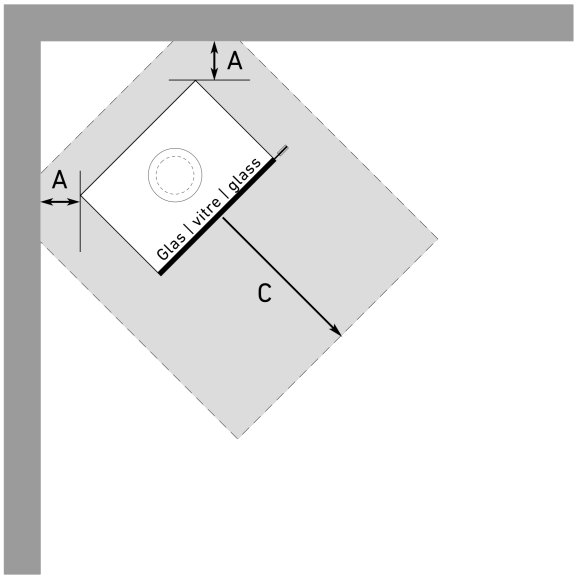

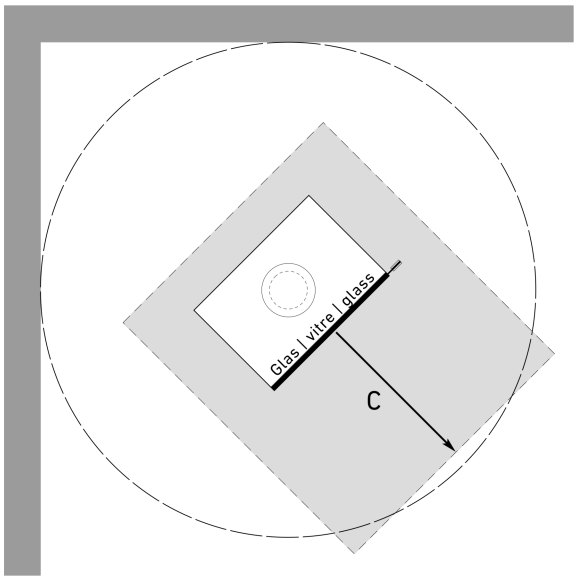

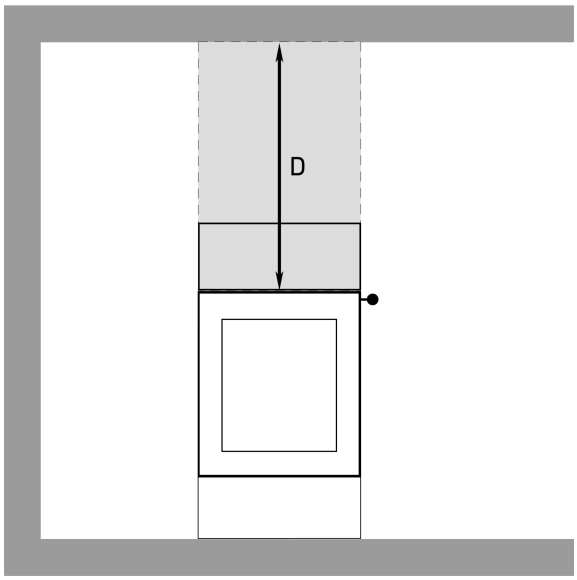

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch